

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**


**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : <b>H01L 21/00</b>		A1	(11) International Publication Number: <b>WO 99/16109</b>
			(43) International Publication Date: 1 April 1999 (01.04.99)
(21) International Application Number: PCT/BE98/00140 (22) International Filing Date: 24 September 1998 (24.09.98) (30) Priority Data: 60/059,929      24 September 1997 (24.09.97)      US 98870056.3      20 March 1998 (20.03.98)      EP 60/079,688      27 March 1998 (27.03.98)      US 60/098,038      27 August 1998 (27.08.98)      US (71) Applicant (for all designated States except US): INTERUNI- VERSITAIR MICRO-ELEKTRONICA CENTRUM VERENIGING ZONDER WINSTBEJAG [BE/BE]; Kapel- dreef 75, B-3001 Heverlee (BE). (72) Inventors; and (75) Inventors/Applicants (for US only): MERTENS, Paul [BE/BE]; Beverdijk 34, B-3150 Haacht (BE). MEURIS, Marc [BE/BE]; Domien Liekenslaan 27, B-3140 Keerber- gen (BE). HEYNS, Marc [BE/BE]; Merelnest 14, B-3210 Linden (BE). (74) Agents: VAN MALDEREN, Joëlle et al.; Office Van Malderen, Place Reine Fabiola 6/1, B-1083 Brussels (BE).			(81) Designated States: JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  Published With international search report.

(54) Title: METHOD AND APPARATUS FOR REMOVING A LIQUID FROM A SURFACE

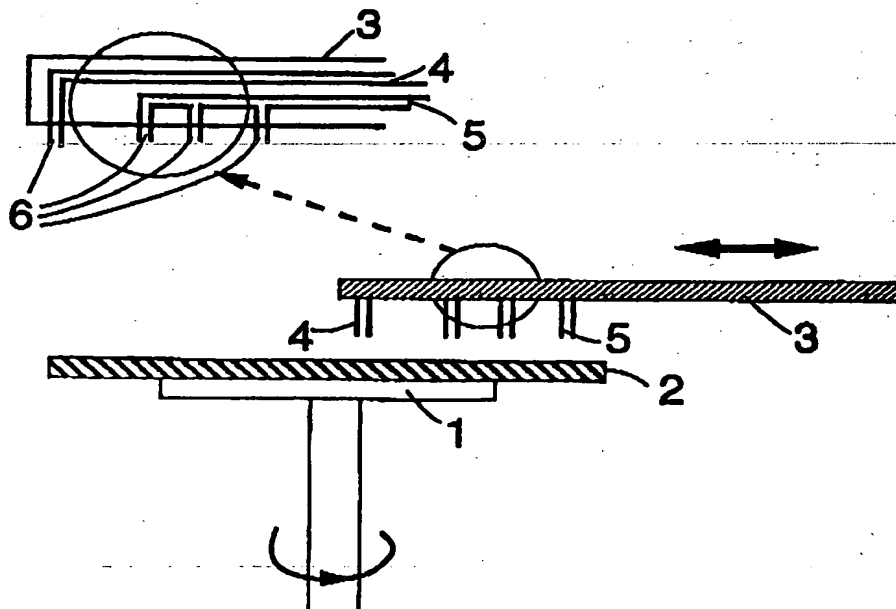

## (57) Abstract

A method and an apparatus for removing a liquid, i.e. a wet processing liquid, from at least one surface of at least one substrate is disclosed. A liquid is supplied on a surface of substrate. Simultaneously or thereafter the liquid or the substrate is locally heated to thereby reduce the surface tension of said liquid. By doing so, at least locally a sharply defined liquid-ambient boundary is created. According to the invention, the substrate is subjected to a rotary movement at a speed to guide said liquid-ambient boundary over the surface of the substrate thereby removing said liquid from said surface.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LJ	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## METHOD AND APPARATUS FOR REMOVING A LIQUID FROM A SURFACE

### FIELD OF THE INVENTION

- 5 The present invention is related to a method of removing a liquid from a rotating substrate. This liquid can be any wet processing liquid as e.g. a wet etching liquid or a cleaning liquid. It can also be a rinsing liquid. The invention is applicable for a number of wet processing steps which are frequently used in the fabrication process of integrated circuits or liquid crystal displays.

10

### BACKGROUND OF THE INVENTION

- 15 The complete and efficient removal of a liquid from a surface of a substrate is a multiply repeated step in e.g. the fabrication process of integrated circuits. Such a step can be performed after a wet etching step or a wet cleaning step or a wet rinsing step or any other step used in said fabrication process wherein said substrate is treated or exposed or immersed in a liquid. Said substrate can be a semiconductor wafer or a part thereof or a glass slice or any other slice of an insulating or conductive material.

20

- The manufacturing of integrated circuits evolves towards processing of each substrate individually rather than in batches of several substrates. In state of the art IC manufacturing, most processing steps as e.g. implantation steps, deposition steps are already performed in a single substrate mode. On the other hand, wet processing steps such as e.g. cleaning steps and subsequent liquid removal steps are typically performed in a batch mode because of lack of appropriate alternatives. Therefore, differences in waiting times are created for each individual substrate between a wet processing step, performed in a batch mode and another processing step, performed in a single substrate mode. Such variability is undesirable with regard to process control. Moreover this mixed batch and single substrate processing increases the cycle time, which is also undesirable. Therefore, there is a general interest in the development of competitive single substrate wet processing steps. Particularly, one of the major challenges regarding single wafer wet processing is a method for removing a liquid from both sides of a substrate. There are two major requirements to be fulfilled for such a method. At first the method should work sufficiently fast. Knowing that in state of the art production lines a substrate is processed typically every 2 to 3 minutes, ideally, in order to avoid equipment duplication, the process step and the liquid removal step should be completed in about such a time frame. Another requirement is related to the preferred substrate orientation. State of the art processing equipment and

25

30

35

transportation tools are developed to handle substrates in a horizontal position. Therefore in order to avoid additional substrate handling it would be desirable to perform the wet processing steps using horizontally positioned substrates.

5           In the United States patent US 5556479, a method is disclosed of drying substrates after treatment in a liquid. After such a treatment the wafers are immersed in rinse water. The wafer are dried by pulling said substrate being immersed in rinse water slowly out of said rinse water while heating the water interface. However, this known method requires that the substrates are pulled out of the rinse water in an  
10       upright position, i.e. a surface of said substrate is about perpendicular to the surface of the rinse water bath as can be seen in figure 3 of US 5556479. This handling is incompatible with the majority of the other process steps where the equipment and transportation tools are developed to handle horizontally positioned substrates.

15           In the United States Patent US 5271774 a spin-drying technique is disclosed which is able to handle horizontal positioned substrates. In fact several small liquid islands are formed being removed from the substrate by a rotary movement. It is known that such a spin-drying technique leaves undesirable residues, often referred to as drying marks, on the substrate surface, particularly on surfaces having mixed  
20       hydrophilic and hydrophobic regions.

## SUMMARY OF THE INVENTION

In an aspect of the invention a method is disclosed of removing a liquid from at least one surface of at least one substrate comprising the steps of:

- 5       subjecting said substrate to a rotary movement  
      supplying a liquid on at least a part of said surface of said substrate; and

10       locally heating said liquid on said part of said surface, while supplying said liquid, to thereby locally reduce the surface tension of said liquid. Particularly, by supplying said liquid and by locally heating said liquid on said part of said surface of said substrate, at least locally a sharply defined boundary is created between the liquid and the ambient, i.e. a so-called liquid-ambient boundary. Alternatively, the substrate can be heated locally at the liquid-ambient boundary. The heat is transferred to the liquid on the surface of the substrate near the liquid-ambient boundary to thereby reduce the surface tension of the liquid at this liquid-ambient boundary.

15       In an embodiment of the invention, said rotary movement is performed at a speed to guide said liquid-ambient boundary over said substrate. Particularly, this speed can be between 2 and 40 revolutions per second or between 1 and 50 revolutions per second or more than 40 revolutions per second. Preferably this boundary is a curved boundary. The configuration is such that the liquid is kept at the outside of the curved boundary, i.e. at the liquid side of the liquid-ambient boundary. No liquid is present at the ambient side of the liquid-ambient boundary. In an embodiment of the invention the substrate can rotate around its own axis. Alternatively said substrate can also be subjected to a rotary movement where said substrate no longer rotates around  
20       its own centre but around an axis parallel to and offset to the axis perpendicular to and through the centre of the substrate.

25       In another embodiment of the invention, on said surface of said substrate fresh liquid is sprayed continuously. The entire surface at the liquid side of the liquid-ambient boundary can be covered, as e.g. for hydrophilic surfaces, with a continuous film of the liquid. The speed of the rotary movement is chosen such that the flow of said sprayed liquid on at least one side of the wafer is transported outwards due to the centrifugal forces. Moreover, by locally heating said liquid, the resulting surface tension reduction of said liquid facilitates the movement of said liquid towards an  
30       edge of the substrate. The surface left behind is cleaned and dried. It is presumed that this drying action is obtained according to at least the combination of the rotary movement and the Marangoni effect. According to the Marangoni effect, by locally  
35

heating the liquid a temperature gradient will be created in the liquid meniscus. This temperature gradient creates an additional force exerted on the liquid film in the direction of the liquid film resulting in a good drying performance.

5           The liquid is selected dependent upon the applied wet processing step like e.g. a wet etching step or a cleaning step or a rinsing step. To initiate the drying process, besides spraying liquid on at least a part of a surface of said substrate, the liquid is locally heated by a heat source to reduce the surface tension of the liquid. Particularly, the heat source can be a nozzle, movable or not, or a static inlet dispensing a heated  
10 gas or a heated vapor or a heated mixture of a vapor and a gas. Also other heat sources can be used such as laser beams or other energetic beams, provided that they can be sufficiently localized. A vapor is defined as the gas phase occurrence of an element or of a compound or of a mixture of elements if the element or compound or mixture should be in the liquid or solid phase at the given temperature and pressure  
15 conditions. Thus a vapor can co-exist in one environment with the solid or liquid phase of the element. A vapor is a specific gas phase occurrence of an element or a compound or a mixture of elements.

          In another embodiment of the invention, another force can be combined with  
20 the liquid removal process of the present invention. Particularly, by using sonic energy as said other force to agitate the liquid applied during the removal process the cleaning performance of said liquid removal process can be enhanced. Doing so can help in particle reduction. Alternatively also contacting a surface with a rotating cleaning pad is an example of such other force.

25           In another embodiment of the invention, eventually prior to the liquid removal step an etching, a cleaning or a rinsing liquid or a sequence of such liquids can be supplied to the entire surface of a rotating substrate. The parameters can be optimized such that a liquid film can completely cover a surface. The spinning motion will  
30 quickly transport the liquid over the surface towards the edge, thus allowing relatively short carry-over transients and thus also allowing for relatively short rinsing times. Using such a continuously switched flow of liquids eliminates the undesirable passage of liquid-gas interfaces over the surface. The liquid removal method of the present invention is applicable for each sequence of at least one wet processing step by the  
35 liquid in order to reduce the surface tension of the liquid. The drying can thus be applied directly on the processing liquid if relevant for the application. Since the proposed drying technique is found to be very fast, process non-uniformity over the surface can be kept very low.

In an aspect of the invention an apparatus is disclosed for removing a liquid from at least one surface of at least one substrate, said apparatus comprising:

5 a substrate holder which is subjectable to a rotary movement, said substrate being releasably held by said substrate holder;

at least one liquid supply system for applying a liquid on at least a part of said surface of said substrate;

10 at least one heat source for locally heating said liquid. Preferably, said heat source and said liquid supply system are positioned such that the position where the heating takes place is closer to the centre of said rotary movement of said substrate holder than the position where said liquid is applied.

15 In an embodiment of the invention, said apparatus further comprises a chamber, wherein said substrate holder is positioned. This chamber is designed in a manner to avoid back splashing of the liquid removed from a surface onto said surface. For instance, a chamber having slanted walls may be used.

20 In another embodiment of the invention, said apparatus further comprises a generator of mechanical vibrations and a transmitter for transmitting said vibrational energy to a surface of the substrate via the liquid being supplied at said surface.

25 In another embodiment of the invention, the heat source is at least one nozzle which dispenses a heated gas or a heated vapor or a heated mixture of a vapor and a gas on said surface of said substrate and said liquid supply system can comprise at least one nozzle for applying said liquid on said surface of said substrate, said nozzles are positioned such that the position where the heating is performed is closer to the centre of the rotary movement of the substrate holder than the position where the liquid is applied. Particularly, at least locally a sharply defined liquid-ambient boundary can be created which is located inbetween a first and a second adjacent  
30 nozzle, said first nozzle being part of said heat source, said second nozzle being part of said liquid supply system. Further according to the apparatus of the invention, said nozzles can be mounted on an arm, said nozzles being movable on said arm and/or said arm being movable relative to said substrate. The heat source can also be a laser beam or another energetic beam instead of a gas nozzle.



In case a heated gas or a heated vapor or a heated mixture of a vapor and a gas is dispensed to locally heat the liquid, the temperature of this heated gas or this heated vapor or this heated mixture is typically in the range from 20 to 200 degrees Celsius. However, the temperature of this heated gas or this heated vapor or this heated mixture is always higher than the temperature of the liquid.

5

## BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 depicts a schematic representation (vertical cross-section) of a tool used for removing a liquid from the topside of a surface of a rotating substrate according to an embodiment of the invention.

Figure 2 a) depicts a schematic representation, i.e. a top view, while fig. 2 b) depicts a cross-section (2b-2b) of a tool used for removing a liquid from a rotating substrate according to an embodiment of the invention.

Figure 3 a) depicts a top view of the cross-sectional plane (C-D of fig 2 b)) perpendicular to the surface of the substrate through the point of liquid impingement (30) and perpendicular to the imaginary line connecting the point of liquid impingement and the rotation centre (31) of a tool used for removing a liquid from a rotating substrate according to an embodiment of the invention. The vector representing the velocity of the liquid leaving the nozzle is in this cross-sectional plane (C-D) or in a plane (3b-3b) perpendicular to the surface of the substrate making a small angle (33) with (C-D), i.e. the liquid velocity vector can be slightly oriented outwards. Figure 3 b) depicts the 3b-3b plane, which is the plane perpendicular to the surface of the substrate through the point of liquid impingement (30) making a small angle (33) with the plane (C-D). The vector representing the velocity of the liquid leaving the nozzle can be in this plane (3b-3b), i.e. the liquid velocity vector can be slightly oriented outwards.

Figure 4 a) depicts a schematic representation, i.e. a top view, while fig. 4 b) depicts a cross-section (4b-4b) of a tool used for removing a liquid from a rotating substrate according to an embodiment of the invention.

Figure 5 depicts a vertical cross-section of an implementation of a tool according to an embodiment of the invention.

Figure 6 depicts a cross section of a chamber, being part of an apparatus according to an embodiment of the invention, wherein a substrate can be releasably held in order to remove the liquid from its surface(s).

## DETAILED DESCRIPTION OF THE INVENTION

5 In relation to the appended drawings the present invention is described in detail in the sequel. Several embodiments are disclosed. It is apparent however that a person skilled in the art can imagine several other equivalent embodiments or other ways of executing the present invention, the spirit and scope of the present invention being limited only by the terms of the appended claims.

10 In an aspect of the invention a method of removing a liquid from at least one surface of at least one substrate is disclosed, said method comprising the steps of:

subjecting said substrate to a rotary movement;

supplying a liquid to said surface of said substrate;

15 locally heating said substrate while supplying said liquid to thereby create at least locally a sharply defined liquid-ambient boundary by locally reducing the surface tension of said liquid. Particularly by locally heating the substrate and consequently the heat is transferred to the liquid near the liquid-ambient boundary, the surface tension of the liquid near this liquid-ambient boundary is reduced. Alternatively instead of heating the substrate, the liquid can also be heated directly in-situ. Said boundary has to be such that, at least within the part of the surface which is not rewetted during a subsequent revolution, said boundary is a continuous one, i.e. said part is determined by the lateral movement of said boundary during a revolution. According to the method of the present invention, said rotary movement is performed at a speed to guide said liquid-ambient boundary over said substrate. The configuration is such that the liquid is kept at the liquid side of the liquid-ambient boundary. Said substrate can be a semiconductor wafer or a part thereof or a glass slice or any other slice of an insulating or conductive material.

30 According to this method of the invention, on at least one surface, preferably on both opposite surfaces simultaneously i.e. the top and bottomside, of at least one substrate fresh liquid is dispensed continuously. The entire surface at the liquid side of the liquid-ambient boundary can be covered with a film of the liquid. The speed of the rotary movement is chosen such that the flow of said liquid dispensed on said surface of the wafer is transported outwards due to the centrifugal forces. The rotational speed, the flow of the liquid supply, and the orientation and the velocity at which the liquid arrives on the surface can be optimized in order to result in a liquid film with a sharp and stable liquid-ambient boundary and to keep the thickness of the liquid film small enough to avoid excessive losses of liquid particularly on the bottomside by gravitational forces. Moreover, locally heating the liquid at the liquid-ambient

boundary results in a surface tension reduction of said liquid thereby facilitating the movement of said liquid towards an edge of the substrate. The surface left behind is cleaned and dried. It is presumed that this drying action is obtained according to at least the combination of the Marangoni effect and a second force. Preferably this second force is the force introduced by a rotary movement or e.g. an oscillating movement. According to the Marangoni effect, by locally heating the liquid a temperature gradient will be created in the liquid meniscus. This temperature gradient creates an additional force exerted on the liquid film in the direction of the liquid film resulting in a good drying performance. Particularly, the centre of the rotary movement can coincide with the centre of the substrate, i.e. the substrate rotates around its own centre. In this case, if a liquid is dispensed on a surface of a substrate rotating typically with a speed between 2 and 20 revolutions per second, but the invention is not limited thereto, a curved shaped liquid-ambient boundary is created. The entire surface area outside of this curved boundary, can be covered with a film of the liquid. Particularly when using hydrophilic substrates, the entire surface area outside of this curved boundary is covered with a continuous film of the liquid. However also other more complex shaped boundaries can be created, particularly on substrates with a high contact angle for the liquid and if a low flow of liquid is applied. Such complex shaped boundaries will also assist in removing a liquid.

The liquid is selected dependent on the applied wet processing step: for etching steps, e.g. dilute aqueous solutions comprising e.g. HF can be used; for cleaning steps, e.g. a mixture of  $\text{NH}_4\text{OH}$ ,  $\text{H}_2\text{O}_2$  and  $\text{H}_2\text{O}$  or a mixture of  $\text{HCl}$ ,  $\text{H}_2\text{O}_2$  and  $\text{H}_2\text{O}$  or dilute  $\text{HCl}$  or a mixture comprising  $\text{O}_3$  can be used; for rinsing steps, the rinsing liquid can comprise  $\text{H}_2\text{O}$ , or a mixture of  $\text{H}_2\text{O}$  and an acid, said mixture preferably having a pH between 2 and 6. Preferably said acid is one of the group of  $\text{HNO}_3$ ,  $\text{H}_2\text{CO}_3$ ,  $\text{HCO}_3$ ,  $\text{HCl}$ ,  $\text{HBr}$ ,  $\text{H}_3\text{PO}_4$ ,  $\text{H}_2\text{SO}_4$ . To initiate the removal process, the liquid is dispensed on least a part of at least one surface of said substrate and said liquid is locally heated by a heat source. The removal process according to the present invention is only applicable if the liquid is compatible with the applied heating. Particularly, the heat source can be a nozzle, movable or not, or a static inlet dispensing a heated gas or a heated vapor or a heated mixture of a vapor and a gas. But also other heat sources can be used such as laser beams or other energetic beams, provided that they can be sufficiently localized.

There are several implementations of the present invention possible, but preferably the implementation has to be such that initially the heating is performed locally at or very close to the centre of the rotary movement, while the liquid is supplied slightly out of centre but adjacent to the position where the heating is

performed. The liquid can also be supplied further away from said centre. By doing so on said surface of said substrate a liquid-ambient boundary can be formed which is initially located at said centre. Then, due to the rotary movement and the movement of the heating source and the liquid supply system, this boundary is slowly guided outwards from the centre to the edge to thereby remove the liquid or the solution of said liquid from said surface of said substrate. A sharply defined liquid-ambient boundary, at least locally, is helpful in order to obtain an optimal performance. The method of the present invention is perfectly suited to handle a horizontal positioned substrate resulting in a secure and reliable approach which is compatible with substrate handling in most of the other process steps in the manufacturing of integrated circuits. Moreover because, according to the present invention, the liquid of the liquid-ambient boundary is continuously refreshed, besides a good drying performance also a better cleaning performance is obtained simultaneously. A better cleaning performance can be obtained regardless of the precise nature of the liquid, i.e. a wet processing liquid like e.g. a cleaning liquid or a rinsing liquid or a wet etching liquid, as long as the liquid is compatible with the applied heating. Furthermore the required amounts of liquid are substantially lower compared with conventional wet processing baths or tanks.

According to the method of the present invention first the liquid can be supplied on a surface of a substrate at or very close to the centre of the rotary movement, while there is no gaseous substance supply. Then, the liquid supply is moved to supply the liquid slightly out of said centre and the liquid is locally heated at said centre while supplying liquid.

Further according to the method of the present invention the liquid can be supplied on a surface of a substrate at or very close to the centre of the rotary movement, while substantially simultaneously a the heat source is turned on to thereby locally heat the liquid adjacent to the centre of the rotary movement. This heat source can be positioned adjacent to said liquid supply. Then, the liquid supply is moved slightly out of said centre, while the heat source is moved to supply heat to the liquid at said centre said centre. Once a liquid-ambient boundary is established, at least locally, both the liquid supply and the heat source are moved such that the liquid-ambient boundary is guided outwards. The ambient is a gas, preferably air and more preferably dry air.

In another embodiment of the invention the centre of the rotary movement coincides with the centre of the substrate, i.e. the substrate rotates around its own centre. Then the heating source is moved to the centre of the rotary movement, i.e. the centre of the substrate, and the heating source is activated to locally heat the liquid at said centre while the liquid is supplied slightly out of centre. Additional liquid can also be supplied further away from said centre. By doing so on said surface of said substrate a liquid-ambient boundary is formed which is initially located at said centre. Then, due to the rotary movement and the movement of the heat source and the liquid supply system, this boundary is slowly guided outwards from the centre to the edge of said surface of said substrate to thereby remove the liquid or the solution of said liquid from said surface of said substrate.

In tests according to an embodiment of the invention, the method of the present invention is applied on the removal of liquid from hydrophilic silicon wafers with a diameter of 150 mm. The removal of the liquid from one surface, being the top side, of the wafer was evaluated. The wafer was mounted on a rotating vacuum chuck. The wafer was rotating around its centre at a speed of approximately 300 rpm. N<sub>2</sub> gas was heated using a simple heater equipped with a thermocouple-thermometer. Because of hardware limitations the maximum temperature of the gas that could be reached was approximately 50°C. In the tests this maximum temperature was chosen. The N<sub>2</sub> flow was set to approximately 3 slm. The liquid was ultra pure water and was supplied through a nozzle at a flow of approximately 70 ml/min. The hot N<sub>2</sub> flow was applied through a second nozzle that was mounted on the same gear moving at a velocity of approximately 0.8 mm/s from the centre of the wafer to the edge. Using these non-optimized conditions the liquid could be removed from the wafer surface in 90 sec. It is believed that stronger heating results in a more powerful liquid-removal force, enabling a drastic reduction of the total process time.

In another embodiment of the invention, in order to enhance the cleaning performance of the liquid removal process of the present invention, an additional force can be exerted on the liquid, particularly on the liquid near the liquid-ambient boundary. Particularly, said liquid can be agitated by using megasonic energy. This megasonic energy can be generated locally by a generator and transmitted to the liquid. Particularly, said generator can be integrated in the liquid supply system and directly transmitting the megasonic energy to the liquid. Then, this megasonic energy is transferred to the surface of the substrate via the liquid. In an implementation a megasonic liquid nozzle or jet is used. This megasonic liquid nozzle consists of a liquid

nozzle and a generator. The liquid which is dispensed on the surface by this megasonic liquid nozzle is agitated by means of said generator. Because there is a continuous flow between the megasonic liquid nozzle and the surface, the megasonic energy is transferred to the surface via the liquid to thereby enhance the cleaning performance of the liquid. This megasonic liquid nozzle can be mounted on an arm together with a heat source. In another implementation, a megasonic arm can be used. This megasonic arm consists of a megasonic generator and a liquid supply system. Particularly said megasonic generator comprises a transducer and a transmitter. Preferably this transmitter has a cylindrical shape and extends along said arm. Said megasonic arm extends over a surface of a substrate, preferably close to said surface. Liquid can be supplied to said surface of the substrate. This liquid is confined between said surface and said arm. So again the megasonic energy can be transmitted to the liquid by means of the transmitter and subsequently via said liquid to the surface of the substrate. Preferably, to maximize the capillary effect during the liquid removal process of the present invention, the distance between the arm and the surface of the substrate is about 0.5 mm or less, but the invention is not limited thereto.

In an aspect of the invention an apparatus for removing a liquid from at least one surface of at least one substrate is disclosed, said apparatus comprising:

a substrate holder (1) (11) which is subjectable to a rotary movement, said substrate (2) being releasably held by said substrate holder;

at least one liquid supply system (5) for applying a liquid on at least a part of said surface of said substrate;

at least one heat source (4) for locally heating said liquid. Preferably, said heat source and said liquid supply system are positioned such that the position where the liquid is heated is closer to the centre of said rotary movement of said substrate holder than the position where said liquid is applied.

In an embodiment of the invention, said apparatus further comprises a chamber, wherein said substrate holder is positioned. This chamber is designed in a manner to avoid back splashing of the liquid removed from a surface onto said surface. For instance, a chamber having slanted walls may be used. Particularly as e.g. in fig. 6, the substrate holder with the substrate releasably held thereon (63) may be positioned horizontally in said chamber. In such case, preferably the side walls (61) of said chamber, being the walls connecting the topside with the bottom side of said chamber,

are oriented such that the angle (64) between said walls and the horizontally positioned substrate holder is smaller than 90 degrees in order to prevent back splashing of the liquid (62) which is removed according to the method of the present invention. The liquid leaving the substrate can be collected on these wall and guided downwards to a drain.

In another embodiment of the invention, as illustrated in figure 1, a substrate (2) is placed on a revolving substrate holder (1). Said substrate can be placed in a chamber of a tool comprising at least one chamber. Preferably the ambient in the chamber is a dry ambient. Said substrate holder and the substrate thereon are rotating with a speed which is typically between 2 and 20 or more revolutions per second. A movable arm (3), which can be guided between the centre and the edge of the substrate extends above the topside of the substrate. Initially one end of this arm is located near the centre of the rotary movement, i.e. the centre of the substrate. Said arm comprises a heat source (4) for locally heating the liquid and a liquid supply system comprising means (5) for supplying a liquid to the substrate. Said heat source further comprises at least one nozzle, initially being placed at or near the centre of the substrate, for dispensing a heated gas or a heated vapor or a heated mixture of a gas and a vapor on said substrate. Said second supply system further comprises at least one nozzle, being placed more outwards than said nozzle for dispensing said heated gas, for spraying said liquid on said substrate. Alternatively, instead of a movable arm comprising fixed nozzles also movable nozzles on a fixed arm can be used. To ensure that each part of the substrate is effectively dried, the translation speed,  $v$ , at which the arm, i.e. the nozzles, moves can be adapted to the rotational (angular) speed,  $\omega$ , of the substrate. Suppose that  $\Delta r$  is the translation distance, being the radial distance over which the liquid-ambient boundary extends radially during one revolution, then the rotational speed can be chosen such that:

$$\Delta r = \frac{2 \pi v}{\omega}$$

For example, suppose that the translation distance per revolution,  $\Delta r$ , equals 1 mm and that the translation speed,  $v$ , equals 1 mm per second, then the rotational speed is 1 revolution per second.

In tests, the nozzles are located such that their centre lines will draw concentric circles on the surface with a difference in radius on the order of 5 mm. By doing so, at the topside of the substrate a curved liquid-ambient boundary is formed which is initially located at said centre of the substrate. Then this boundary is slowly guided outwards by moving said arm (3) from the centre to the edge of the substrate to



thereby remove the liquid or the solution of said liquid from the topside of said substrate. The liquid-ambient boundary is located in between heat source and the nearest nozzle spraying the liquid. Spraying the liquid can be done such that at least locally a sharp and stable curved boundary is obtained, and particularly in case hydrophilic substrates are used the entire surface of the substrate at the outside of the boundary is kept wet. This will involve optimization of the orientation of the liquid nozzle(s) and of the velocity of the liquid leaving the nozzle. In order to limit splashing of the liquid the angle (32) between the velocity vector of the liquid (figure 3 (13)) when leaving the nozzle and the velocity vector of the rotating surface (figure 3 (14)) at the point (30) where the liquid flow impinges can be kept small. Eventually, the liquid nozzles can also be slightly oriented outwards, i.e. typically at an angle (33) between 0 degrees and 5 degrees. For removing a liquid having a low contact angle in contact with the surface, it is found sufficient to have only one nozzle for supplying the liquid. In case of higher contact angles, in order to maintain a wet substrate surface outside the drying boundary, additional nozzles for spraying liquid can be installed at equal or greater distance from the rotation centre (31). In order to further limit the consumption of the liquid the additional nozzles can be turned off as they move over the substrate edge. It may be useful to progressively modulate the flow and the rotation speed as the drying proceeds from the centre towards the edge of the substrate.

In another embodiment of the invention, as illustrated in figure 2, a substrate (2) can be clamped into a ring-shaped substrate holder (11) having an inner diameter larger than the diameter of the substrate. The clamping is done using minimal contact surface. The substrate holder or alternatively the substrate itself is placed between at least two revolving means (12) which transmit the rotational force to said substrate holder comprising the substrate or alternatively to said substrate alone. Said substrate holder comprising said substrate or said substrate alone can be placed in a chamber of a tool comprising at least one chamber. Said substrate is rotating at a speed which is typically between 2 and 40 revolutions per second. Two movable arms (3), which can be guided separately or simultaneously between the centre and the edge of the substrate extend above the topside and below the bottomside of the substrate. Initially one end of each of these arms is located near the centre of the substrate. Each of these arms comprises a liquid supply system and a heat source being isolated one from the other. Said heat source and said liquid supply system are positioned such that at each side the position where the liquid is heated by the heat source is closer to the centre of said rotary movement of said substrate holder than the position where said liquid is applied. By doing so both at the topside and on the bottomside of the substrate a liquid-ambient boundary can be formed which is located at said centre of the substrate.

Then this boundary is slowly guided outwards by moving said arms (3) from the centre to the edge of the substrate to thereby remove the liquid or the solution of said liquid from the surfaces of said substrate. In order to limit splashing of the liquid the angle between the velocity of the liquid (figure 3 (13)) when leaving the nozzle and the velocity of the rotating surface (figure 3 (14)) at the point where the liquid flow impinges can be kept small.

Another approach for building this rotation system is shown in figure 4. In this case, at the bottomside, a set of arms (18) with a bar of nozzles (19) attached thereon at the bottomside is mounted on a central shaft (15). Around this shaft a hollow shaft (16) is rotating. On this hollow shaft the clamping means (17) of the substrate are fixed. The set of arms moving over a radius of the substrate comprises at least a first arm and a second arm and can be made compact, i.e. like a man's arm. Said first arm is connected to said shaft to rotate about a first axis orthogonal to and through the rotation centre of the substrate holder. Said second arm is parallel to but offset from the first arm with the first arm and the second arm being rotatably connected at a joint to rotate about an axis parallel to the first axis. The set of arms on the topside can be similar, but no rotation gear is required at the topside.

In another embodiment of the invention (fig. 5), the liquid supply system (3) comprises a cup-shaped nozzle (51) which can be guided over the rotating substrate (2) and which is positioned very close to a surface of a substrate. Particularly, the distance between this cup-shaped nozzle and a surface of the substrate is typically about 0.5 mm. The liquid, e.g. water, can be supplied through the cup.

In another embodiment of the invention, said apparatus further comprises a generator of megasonic energy and a transmitter for transmitting said megasonic energy to a surface of the substrate via the liquid being supplied at said surface. In particular a megasonic liquid jet or a megasonic arm can be used

## WHAT IS CLAIMED IS:

1. A method of removing a liquid from at least one surface of at least one substrate comprising the steps of:
  - 5       subjecting said substrate to a rotary movement
  - supplying a liquid on at least a part of said surface of said substrate; and
  - locally heating said liquid on said part of said surface, while supplying said liquid.
- 10   2. A method as recited in claim 1, wherein, by supplying said liquid and by locally heating said liquid on said part of said surface of said substrate, at least locally a sharply defined liquid-ambient boundary is created.
- 15   3. A method as recited in claim 1, wherein said rotary movement is performed at a speed to guide said liquid-ambient boundary over said surface of said substrate .
4. A method as recited in claim 3, wherein said rotary movement is applied on a single substrate such that said substrate rotates around its own centre.
- 20   5. A method as in claim 4, wherein the rotation speed is in the range from 2 to 40 revolutions per second.
6. A method as recited in claim 1, wherein said heating is accomplished by means of dispensing a heated gas or a heated vapor or a heated mixture of a gas and a vapor.
- 25   7. A method as recited in claim 1, wherein said heating is accomplished by means of irradiation with an energetic beam.
8. A method as recited in claim 1, wherein said liquid is one of a group of an etching liquid, a cleaning liquid or a rinsing liquid.
- 30   9. A method as recited in claim 1, wherein said liquid is a dilute aqueous solution.

10. A method as recited in claim 8, wherein said cleaning liquid comprises a mixture of  $\text{NH}_4\text{OH}$ ,  $\text{H}_2\text{O}_2$  and  $\text{H}_2\text{O}$ ; or comprises a mixture of  $\text{HCl}$ ,  $\text{H}_2\text{O}_2$  and  $\text{H}_2\text{O}$ ; or comprises diluted  $\text{HCl}$ ; or comprises a mixture comprising  $\text{O}_3$ .

5 11. A method as recited in claim 8, wherein said rinsing liquid comprises  $\text{H}_2\text{O}$ ; or a mixture of  $\text{H}_2\text{O}$  and an acid, said mixture having a pH between 2 and 6.

12. A method of removing a liquid from a first surface and a second surface of at least one substrate comprising the steps of:

10       subjecting said substrate to a rotary movement

          supplying a liquid on at least a part of said first side and at least a part of said second side of said substrate; and

          locally heating said liquid on said part of said first surface and on said part of said second surface, while supplying said liquid, to thereby locally reduce the surface  
15       tension of said liquid.

13. An apparatus for removing a liquid from at least one surface of at least one substrate, said apparatus comprising:

          a substrate holder which is subjectable to a rotary movement, said substrate  
20       being releasably held by said substrate holder;

          at least one liquid supply system for applying a liquid on at least a part of said surface of said substrate;

          at least one heat source for locally heating said liquid; and  
          said heat source and said liquid supply system being positioned such that said heating  
25       is applied closer to the centre of said rotary movement of said substrate holder than said liquid.

14. An apparatus as recited in claim 13, further comprising a chamber wherein said substrate holder is positioned, said chamber being designed in a manner to avoid back  
30       splashing of said liquid on said surface of said substrate.

15. An apparatus as recited in claim 13, where said heating source comprises at least one nozzle for dispensing a heated gas, or a heated vapor or a heated mixture of a vapor and a gas on said surface of said substrate and said liquid supply system

comprises at least one nozzle for applying said liquid on said part of said surface of said substrate, said nozzles are positioned such that said heating is applied closer to the centre of the rotary movement of the substrate holder than said liquid.


- 5 16. An apparatus as recited in claim 15, where said nozzles are mounted on an arm, said arm being movable relative to said substrate holder.

17.

An apparatus as in claim 13, wherein said heat source is a source of radiant energy.


1/5

Figure 1

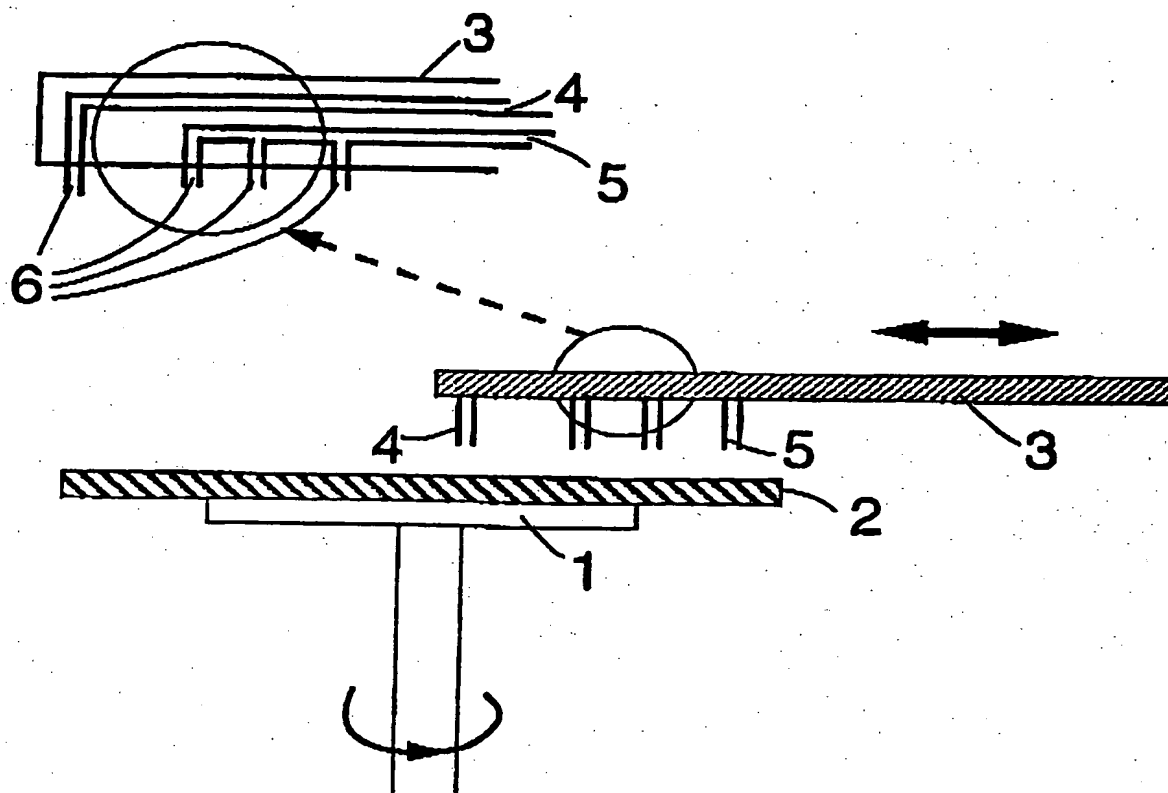


2/5

Figure 2

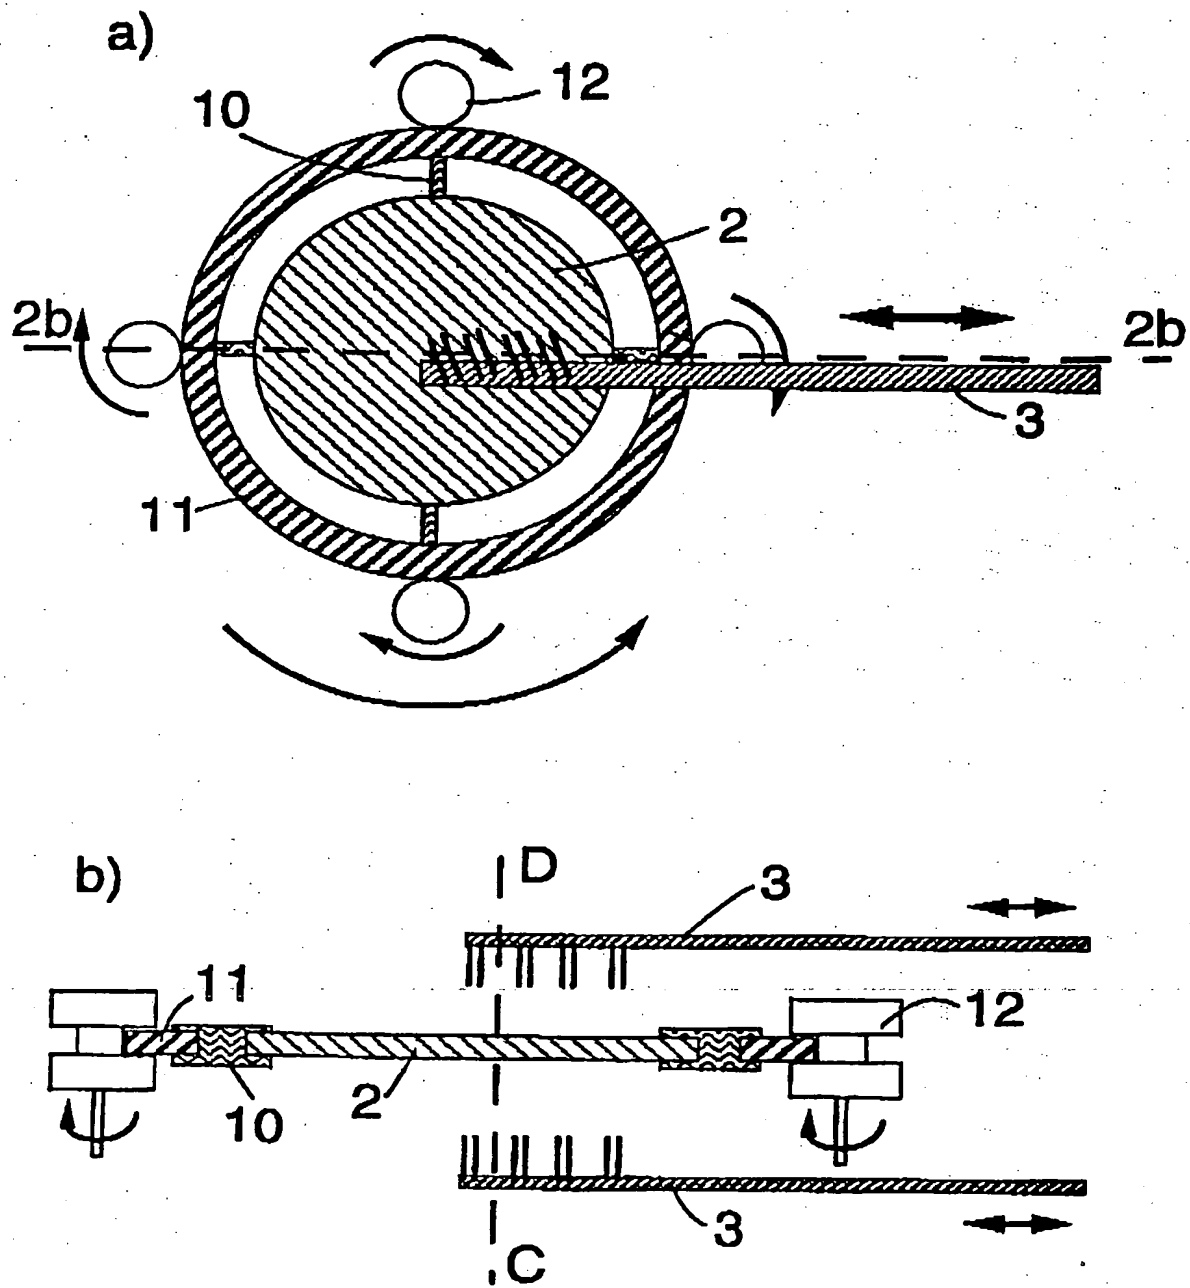

**Figure 3**

**Fig. 3a)**

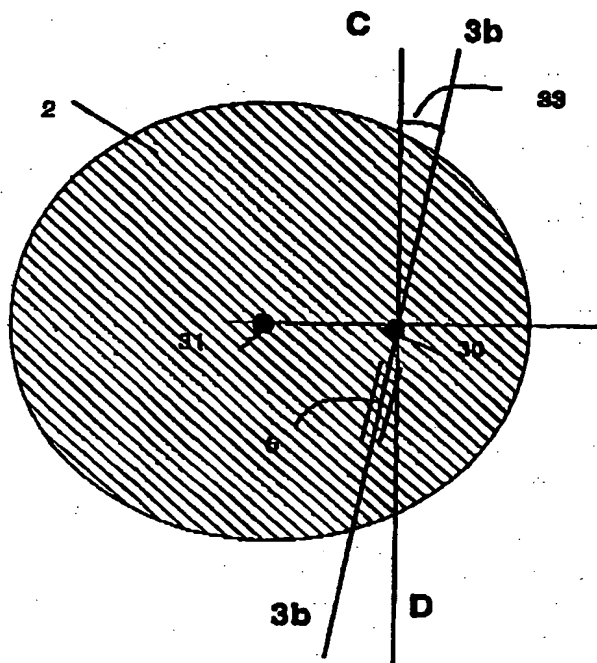

**Fig. 3b)**

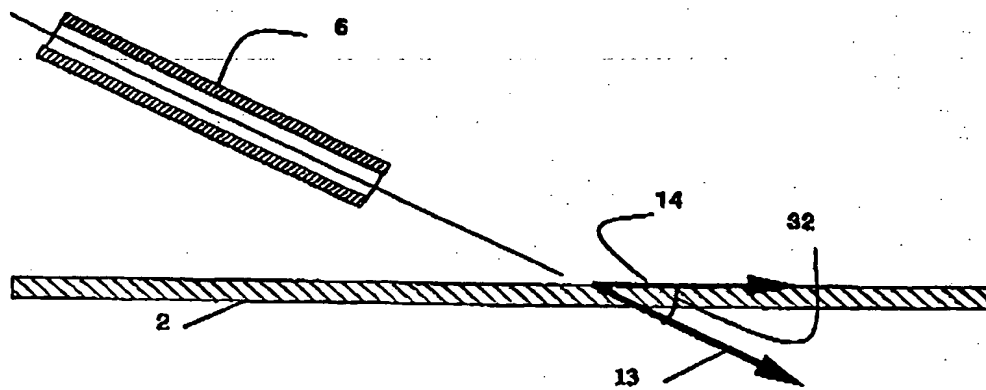




Figure 4

Fig. 4a)



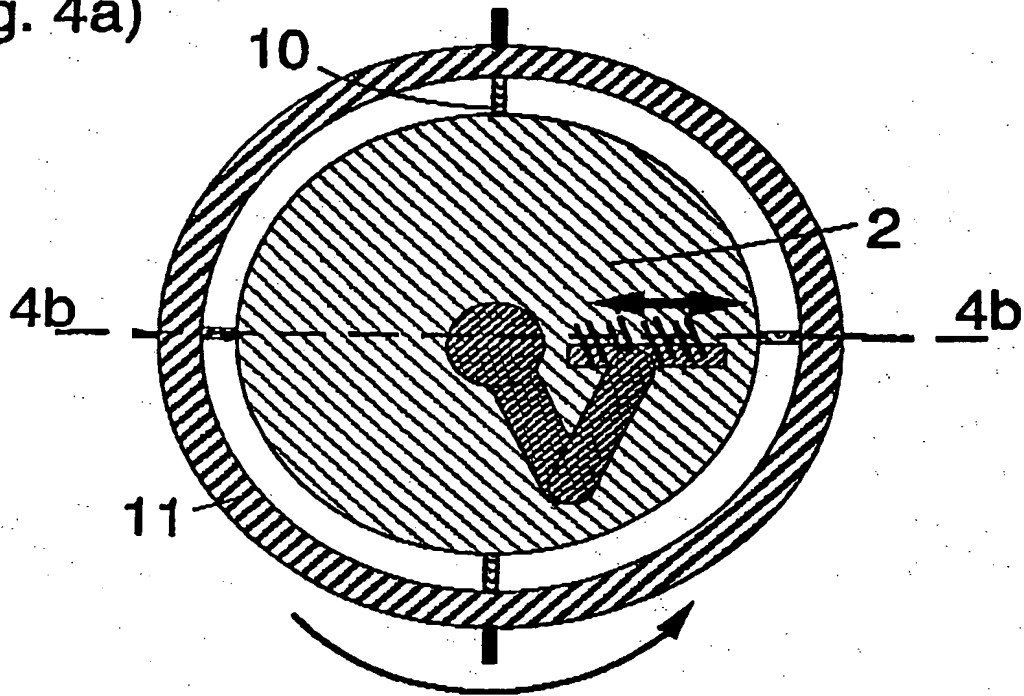



Fig. 4b)

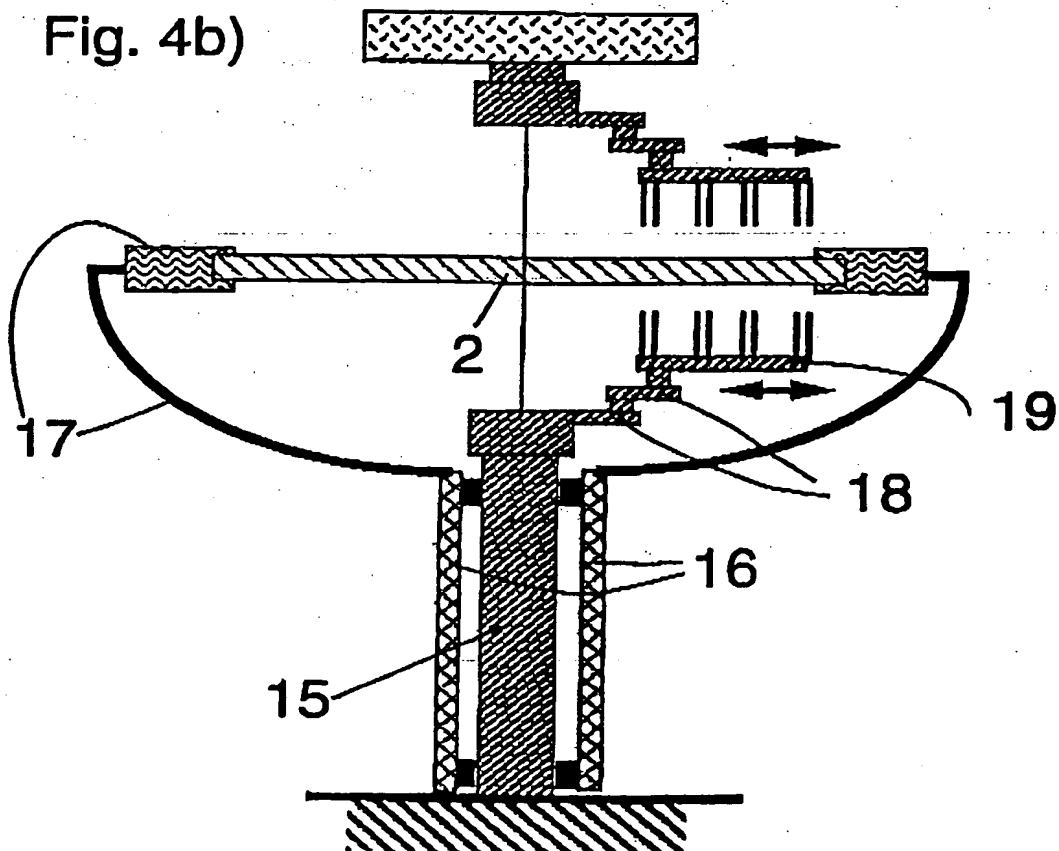

**Figure 5**

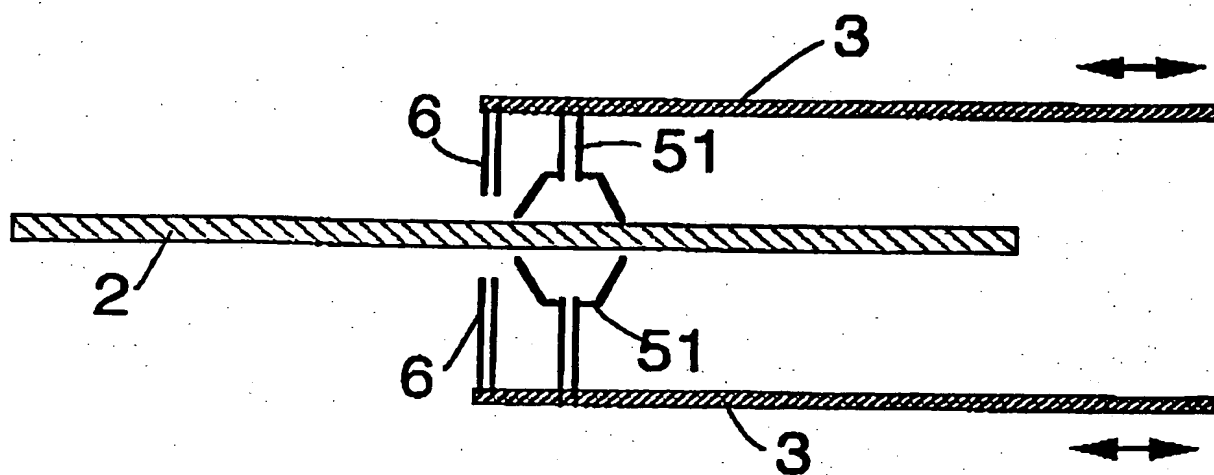

**Figure 6**

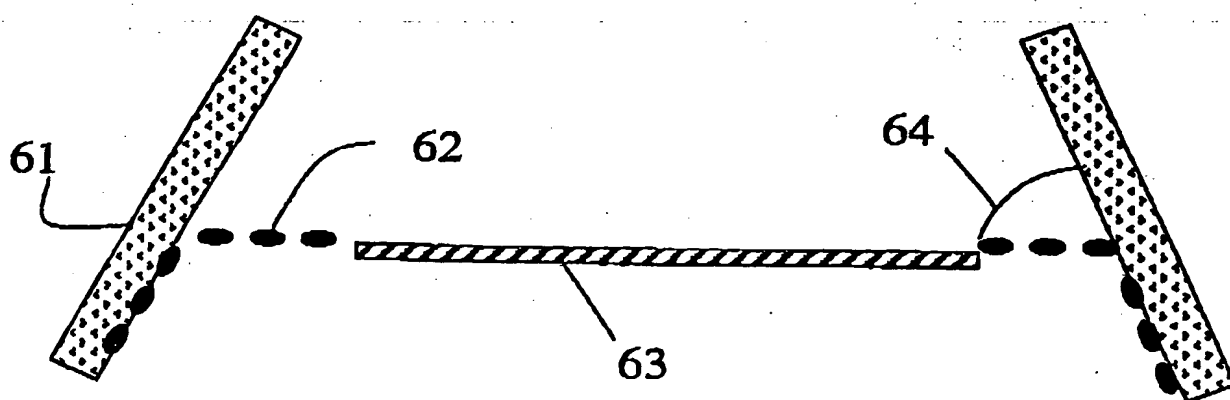

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/BE 98/00140

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 H01L21/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 095, no. 011, 26 December 1995 & JP 07 211686 A (SONY CORP), 11 August 1995 see abstract	1,3,4,8, 11-13
A	US 4 027 686 A (SHORTES SAMUEL R ET AL) 7 June 1977 see column 8, line 26 - line 68; figure 4	1,12,13
A	PATENT ABSTRACTS OF JAPAN vol. 097, no. 010, 31 October 1997 & JP 09 162159 A (DAINIPPON SCREEN MFG CO LTD), 20 June 1997 see abstract	1,3,4,8, 12,13

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

5 January 1999

Date of mailing of the international search report

12/01/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Rieutort, A

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/BE 98/00140

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4027686 A	07-06-1977	CA 987794 A	20-04-1976
		DE 2364135 A	11-07-1974
		FR 2212770 A	26-07-1974
		GB 1445008 A	04-08-1976
		JP 49099480 A	19-09-1974
		NL 7317476 A	04-07-1974